



# SKMEI SMART WATCH 1743

كاتالوج



# SKMEI 1743 Operation Manual



- ★A Key : EL Back Light, Bluetooth Switch.
- ★B Key : Mode Conversion, Confirming and Save.
- ★C Key : Selection, Setting, Reset.
- ★D Key : Up, Begin timing, Pause, Switch, Photograph.

## Function instruction:

### 一、Watch side

- ★ Built-in low-power BLE4.0.
- ★ Time and exercise data can be synchronized via mobile phone.
- ★ In the case of BLE connection with the mobile phone, the watch can realize instant messaging, call notification and remote photography.
- ★ 12-digit timing function, display hour, minute, second, day, month, week.
- ★ Smart alarm clock (implemented with APP).
- ★ Step counting function, the watch intelligently calculates the number of steps, calories, and walking distance, the watch will automatically record the data of the day.
- ★ Stopwatch/Chronograph: Maximum stopwatch timing 23 hours, 59 minutes and 59 seconds.
- ★ 12/24 hour Format setting selection, automatic calendar.
- ★ EL backlight.

### 二、APP side

- ★ APP will organize and save the exercise data obtained through the watch, and automatically generate daily exercise, weekly exercise, and monthly exercise reports.
- ★ The exercise plan can be set through the APP, and the APP will conduct exercise analysis according to the personally defined plan.
- ★ App has built-in cycling and running modes respectively. Through the use of watch and mobile phone, exercise data and trajectory can be obtained separately. These data and movement trajectories can be shared to the circle of friends.
- ★ APP can select and set the reminder function of the watch (such as PHONE CALL, WECHAT can be turned on or off).

## ON/OFF MODE

Turn on: Press the four buttons of the watch at the same time until the display turns on, indicating that the watch is turned on.

Power off: Press the four buttons of the watch at the same time until the display turns off, indicating that the watch has been turned off.


## Bluetooth ON/OFF Mode

- ★ In any mode, press and hold A key for about 3 seconds to turn on or off the Bluetooth of the watch.
- ★ When the watch has not been successfully connected with the mobile phone, the Bluetooth icon on the display is flashing.
- ★ When the connection between the watch and the mobile phone is successfully completed, the Bluetooth icon on the display is in a flashing state;



## Date Setting Mode

- ★ In the normal time mode, press B key once to enter the date view mode. At this time, press and hold C key for 3 seconds, the watch will enter the date setting mode. At this time, the characters representing "year" are flashing (gray characters are flashing).
- ★ Short press C key to select the desired character.
- ★ Short press D key to adjust the selected value, press and hold it to adjust in rapid increments;
- ★ After completing the setting, press B key to confirm and return to the normal time mode, or the watch will automatically return to the normal time mode when there is no key operation within 15 seconds;

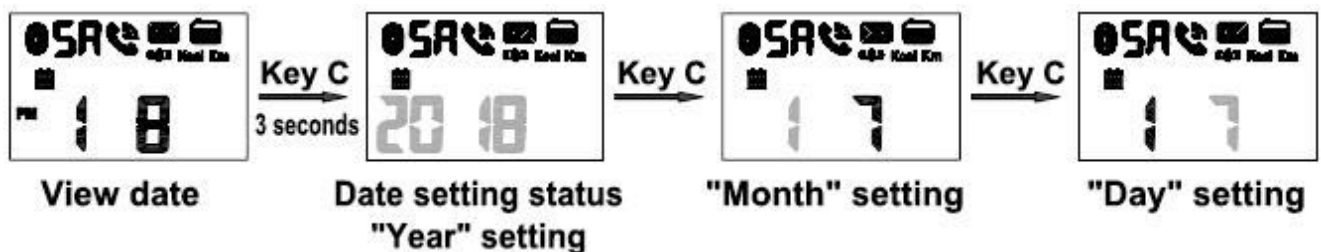

## Alarm Setting Mode


- ★ In alarm mode, press and hold C key for 3 seconds to enter the alarm setting. At this time, the characters representing "hour" are flashing (gray characters are flashing);
- ★ Press C key to select the characters;
- ★ Press D key to turn on numerical adjustment, press and hold D key to make quick incremental adjustments;
- ★ After setting, press B key to confirm and return to normal time mode, or the watch will automatically return to the normal time mode when there is no operation after 15 seconds;



## Stopwatch Setting Mode


- ★ In stopwatch mode, press D key to start timing. In timing state, press D key to pause the stopwatch timing;

- ★ When the stopwatch is paused, press C key to clear the timing;
- ★ Press B key to return to normal time mode;

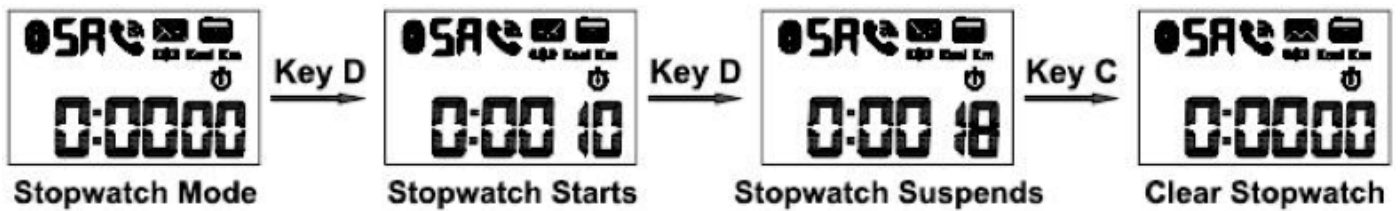

## Switch Mode

- ★ In normal time mode, press B key to switch the function modes;
- ★ Press B key to view steps, calories and distance;
- ★ In any modes, the watch will automatically return to the normal time mode when there is no operation after 15 seconds.
- ★ In any modes, press and hold A key for 3 seconds to turn on/off Bluetooth.

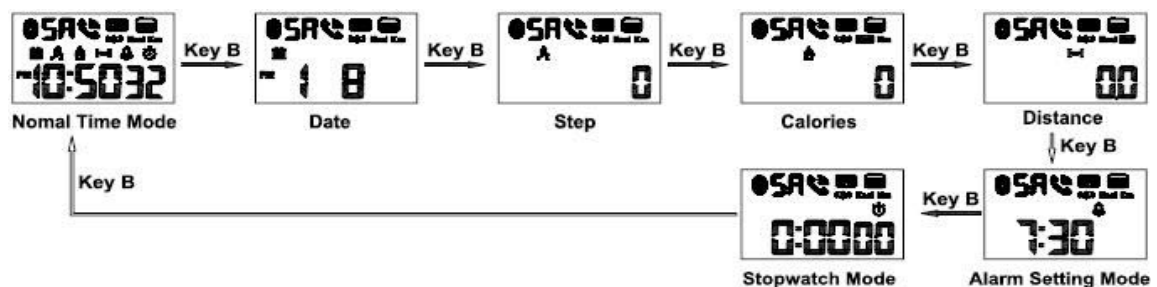


## EL back light

At any modes, press A key once, the EL back light on for 3 seconds.

## Time Setting

- ★ In normal time mode, press and hold C key for 3 seconds to enter the time setting. At this time, the characters representing "time" are flashing (gray characters are flashing);
- ★ Press C key to select the characters;
- ★ Press D key to turn on numerical adjustment, press and hold D key to make quick incremental adjustments;
- ★ After setting, press B key to confirm and return to normal time mode, or the watch will automatically return to the normal time mode when there is no operation after 15 seconds;

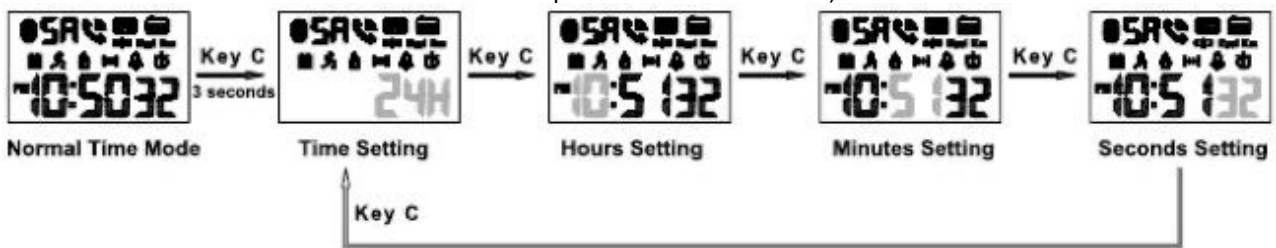

# Intelligent Power Management

- ★ When the watch and phone are offline for more than 300 seconds, the watch system will automatically turn off the BLE to prevent excessive power consumption; When the user needs to use the service in the smart watch or upload the exercise data of the watch, only need to wake up their respective Bluetooth (the Bluetooth on phone and watch are turned on) to achieve automatic connection.
- ★ When the watch is in a static state for more than 3 minutes, the watch will automatically enter sleep mode; at this time, the watch will be in an ultra-low power consumption.


## Download APP and Use

- 1、 **APP download:** Search“READfit”in“Google Play”or“APP Store”; or scan the following QR code to download APP.




## 2、APP use:

- ★ Find and click the READfit icon in the mobile app
- ★ Connection between APP and phone

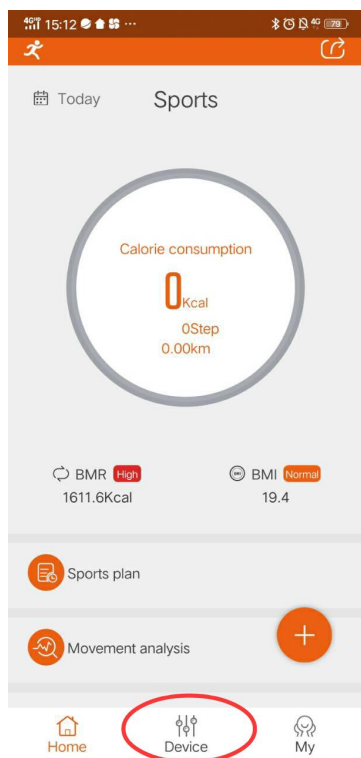


App homepage

Click  
“Device”

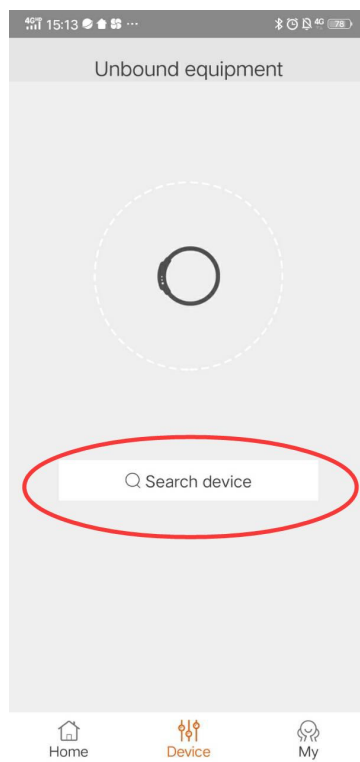



Click“Search  
device”

Bound equipment

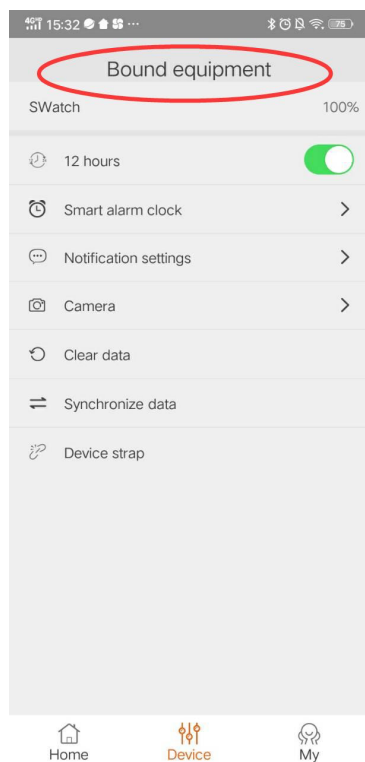


Screen after  
bounding

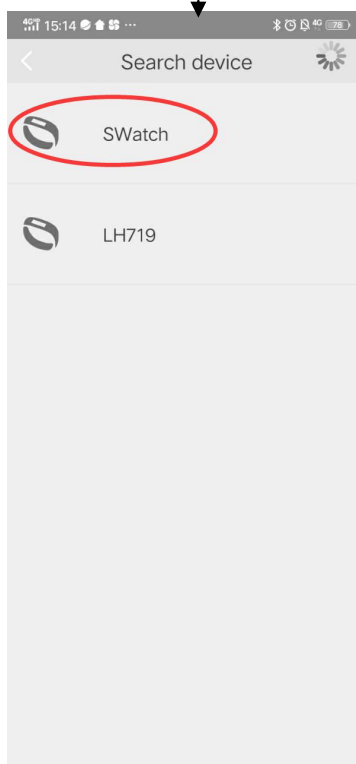

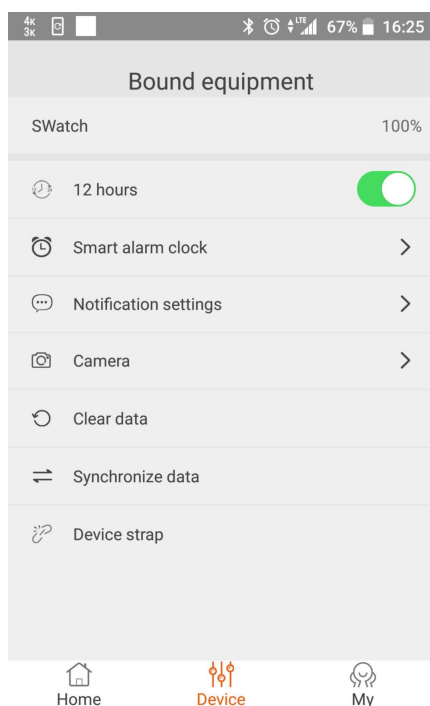

The pop-up screen of the watch APP device menu as shown on the left can be set according to the habits and needs of individual users

Screen after binding

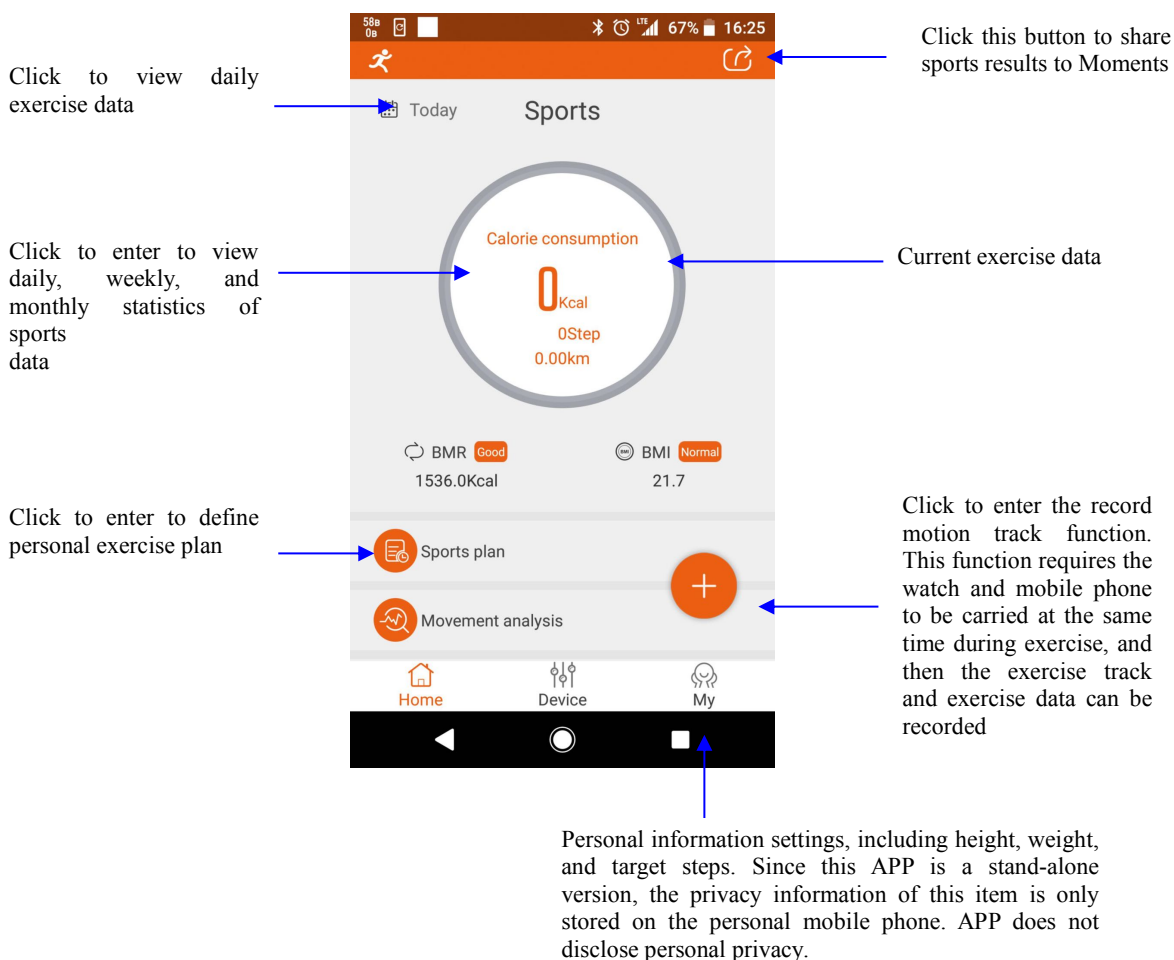

# **Precautions for communication between Bluetooth watch and mobile phone**

1. When the watch is replaced with a new battery, the APP on the mobile phone needs to re-bind the watch to realize normal communication.
2. Before binding the watch, the APP needs to unbind the previous connection. For details, please refer to the help file in the APP.