




SKMEI
DIGITAL WATCH
1606



8075 MOVEMENT INSTRUCTION

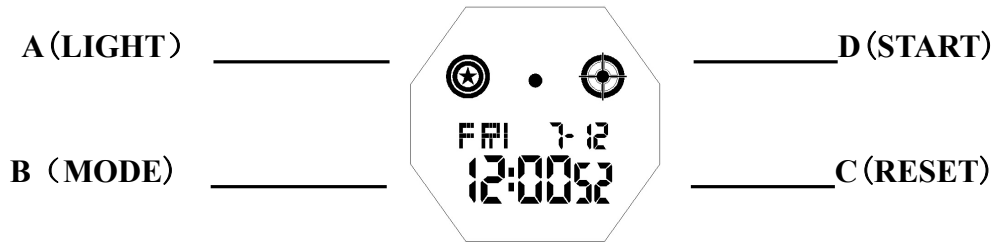


FEATUR

- ★ Normal Time: Hour, Minute, Seconds, Month, Day and Week;
- ★ 12/24hr format;
- ★ Alarm, the hour tell function;
- ★ 1/100 second Chronograph with split functions;
- ★ Countdown function, to: 23:59:59;
- ★ Dual time;
- ★ 3 second EL backlight.


FUNCTIONAL

CHANGE FUNCTION

- ★ Under time mode, press B key switch the following mode: Time mode → Alarm mode → Stopwatch → Countdown;

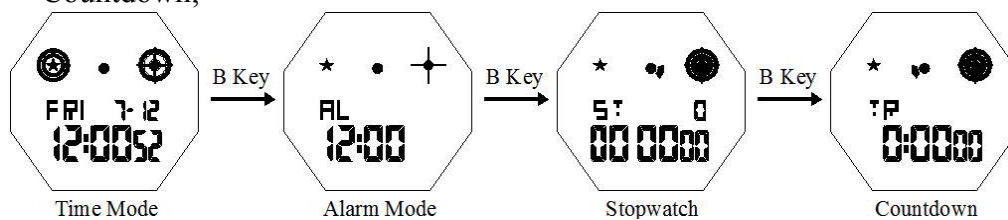


- ★ Under time mode, press D key change the dual time mode;

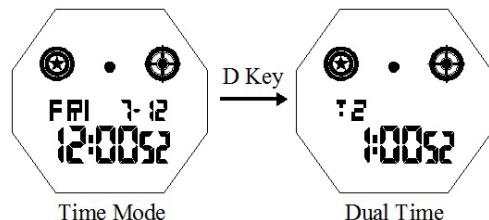

- ★ Under any mode, press A key to on EL backlight for 3 seconds.

TIME/DATE SETTING

- 1、Under time mode, press and hold C key enter the time setting mode, “second” flashes;
- 2、Press B key to change setting items: second → minute → hour → week → day → month → 12/24hr;

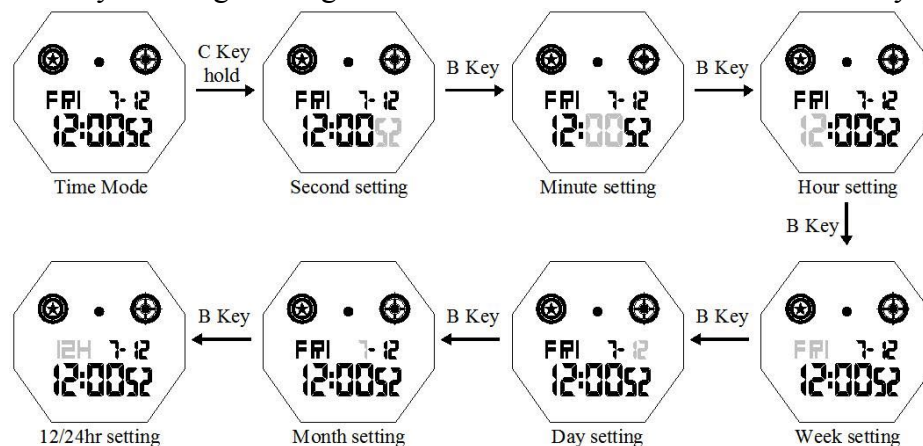


3、 Press D key adjust the setting items, press and hold D key to rapid adjust;

4、 After setting, press C key exit setting mode.


ALARM MODE

1、 Under alarm mode, press C key order to open: daily alarm → hourly chime → daily alarm and hourly chime;

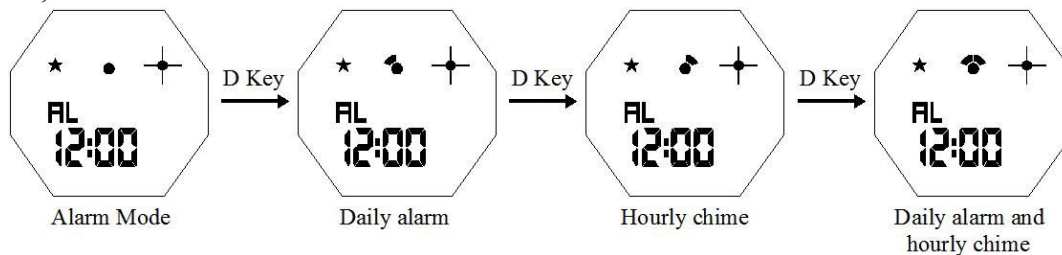

2、 Under alarm mode, press and hold C key enter alarm setting mode, “hour” flashes;


3、 Press B key to change setting items: hour → minute;

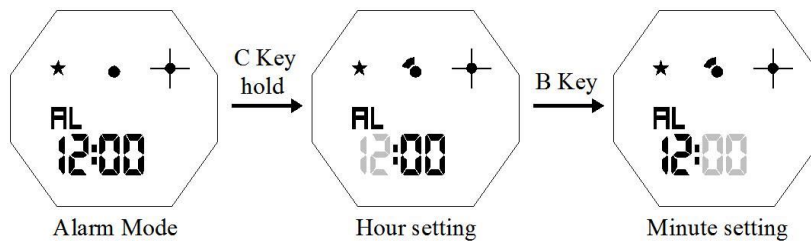

4、 Press D key adjust the setting items, press and hold D key to rapid adjust;

5、 After setting, press C key exit setting mode.

STOPWATCH

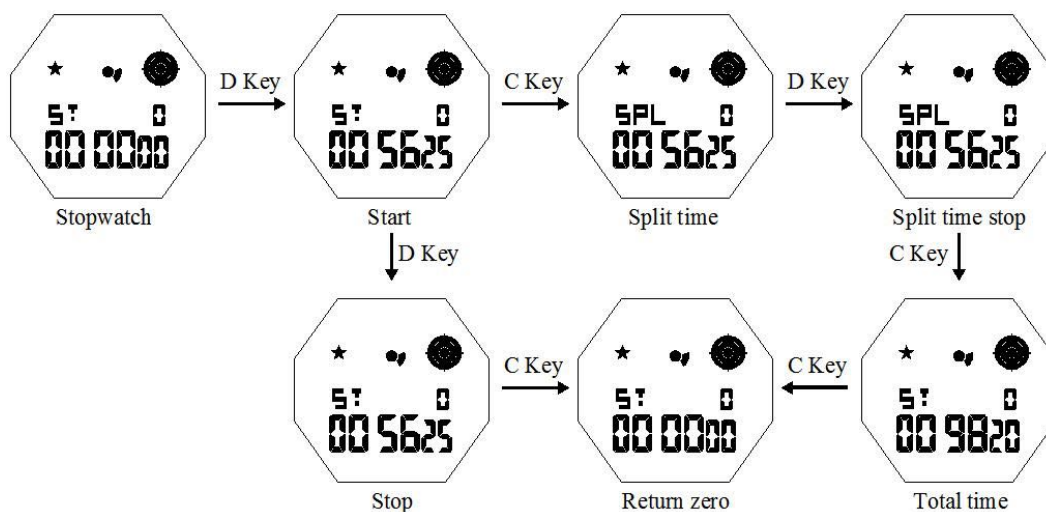


1、 Under stopwatch mode, press D key start/ stop stopwatch, When the stopwatch stops the clock, press C key reset timing data.

2、 During the stopwatch timer, press C key turn on the split time, display “SPL” on the screen. The stopwatch continued to time, press C key return to the stopwatch timer again.

3、 Stopwatch reaching the maximum(59’59”99), then on-alarm prompted to restart the stopwatch timer.


COUNTDOWN TIMER

Range: 23:59.59

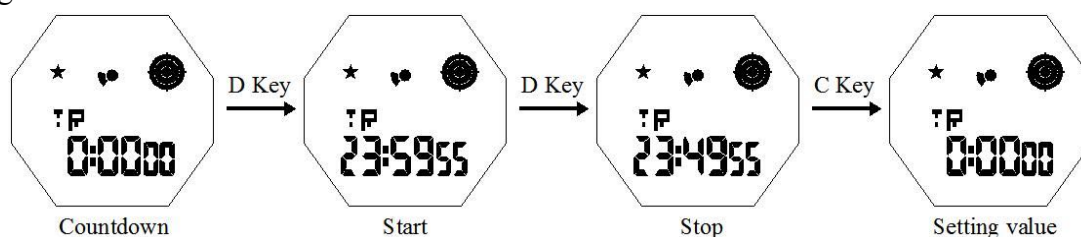

COUNTDOWN SRTTING

- 1、 Under countdown mode, press and hold enter the setting mode, “hour” flashes;
- 2、 Press B key to change setting items: hour→minute;

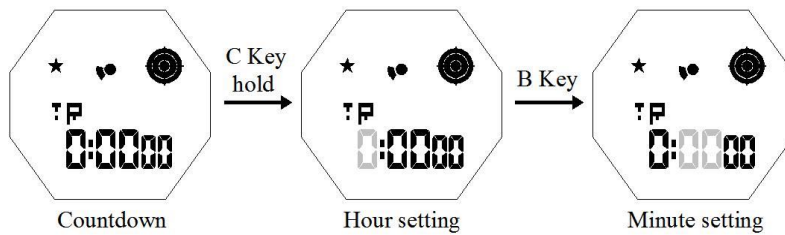


- 3、 Press D key adjust the setting items, press and hold D key to rapid adjust;
- 4、 After setting, press C key exit setting mode.
- 5、 When countdown reach to 00:00.00, the countdown icon disappears and 15 seconds alarm reminders, press any key to stop the alarm.
- 6、 When stop the alarm, display the countdown setting value.

DUAL TIME

Dual time setting

- 1、 Under dual time mode, press and hold enter the dual time setting mode, “hour” flashes;
- 2、 Press B key to change setting items:minute→hour;

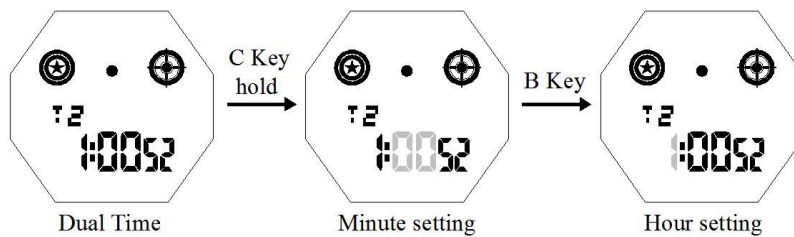

- 3、 Press D key adjust the setting items, press and hold D key to rapid adjust;
- 4、 After setting, press C key exit setting mode.